



Air & water-tight seal



Consistent seal quality



Comprehensive range of spares

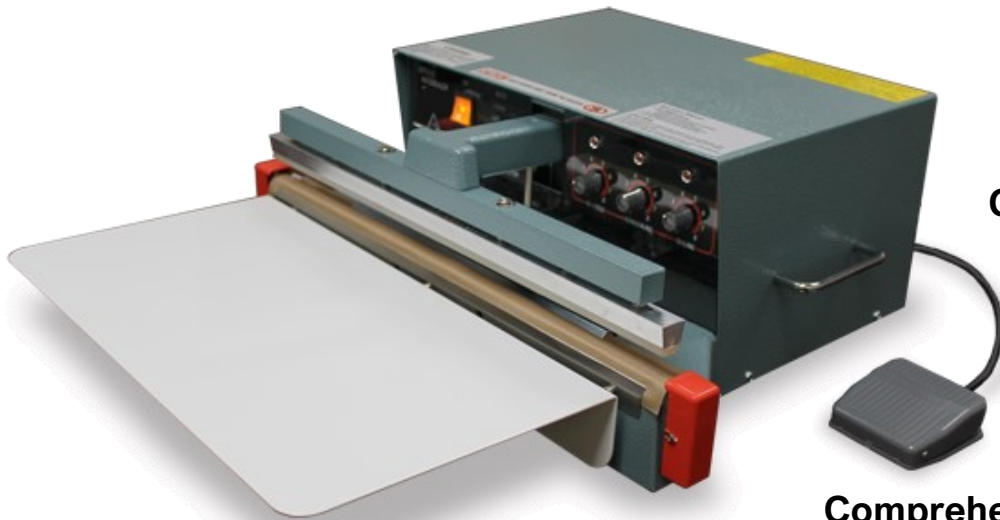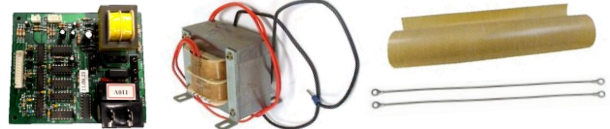

SPECIFICATIONS

- Sealing Length: 450mm
- Seal Width: 5mm
- Timer Duration: 0.2 – 2.5 seconds
- Congealed Timer Duration: 1 – 8 seconds
- Auto Function Timer Setting: 1 – 8 seconds
- Cable Type Foot Pedal
- Power Consumption: 900W
- Voltage/Frequency: 230V-240V/50Hz
- Electrical Plug Type M-16A
- IEC 60 335-2-45 Compliant
- Weight: 26Kg
- Sealing PE/PP/LDPE/PVC Thermoplastics
- Maximum Material Thickness: 300 micron
- Packaging: 1 Pc / Box
- Wire Element & Fuse Spares Kit Included

USAGE

This efficient, consistent, auto type industrial heatsealer is appropriate for use with most types of thermoplastic.

The sealer uses an electromagnet mechanism to activate the sealing arm. 2 sealing modes provide the user with the option to use the cable type foot pedal (Manual Mode) or the Recycle Timer (Auto Mode).

The additional Congealing Timer allows for a longer cooling time & a consistent more secure seal.